



## Ku-band Transmitter 2.0W Type

# **MODEL NO. NJT5024 / 24F**

### <Description>

This unit is the fixed gain transmitter incorporating a low phase noise Phase Locked Local Oscillator and a high reliable MMIC High Power Amplifier, and converts L Band (950 to 1,450 MHz) IF Input to Ku Band (14.0 to 14.5 GHz) RF Output.

### <Line-Up>


Model No.	RF Frequency	Local Frequency	IF Frequency	Output Power
NJT5024 / 24F	14.0 to 14.5 GHz	13.05 GHz	950 to 1,450 MHz	2.0 W Linear

### <Specifications>

Item	Specifications
Output Power	+33 dBm
Phase Noise (SSB)	-60 dBc/Hz max. @ 100 Hz -70 dBc/Hz max. @ 1 kHz -80 dBc/Hz max. @ 10 kHz -90 dBc/Hz max. @ 100 kHz
Required External Reference Signal	Frequency : 10 MHz Input Power : -5 to +5 dBm Phase Noise : -135 dBc/Hz max. @ 100 Hz -140 dBc/Hz max. @ 1 kHz -143 dBc/Hz max. @ 10 kHz -143 dBc/Hz max. @ 100 kHz
Input Interface	N-type, female (50 ohm) [Model No. NJT5024] F-type, female (75 ohm) [Model No. NJT5024F]
Input / Output V.S.W.R.	2.0:1 max. @ Input 2.0:1 max. @ Output
Mute	Shut off the HPA in case of LO unlocked
Power Requirement	+15 to +24 V dc
Power Consumption	3.0 A max.



<OutlineDrawing>

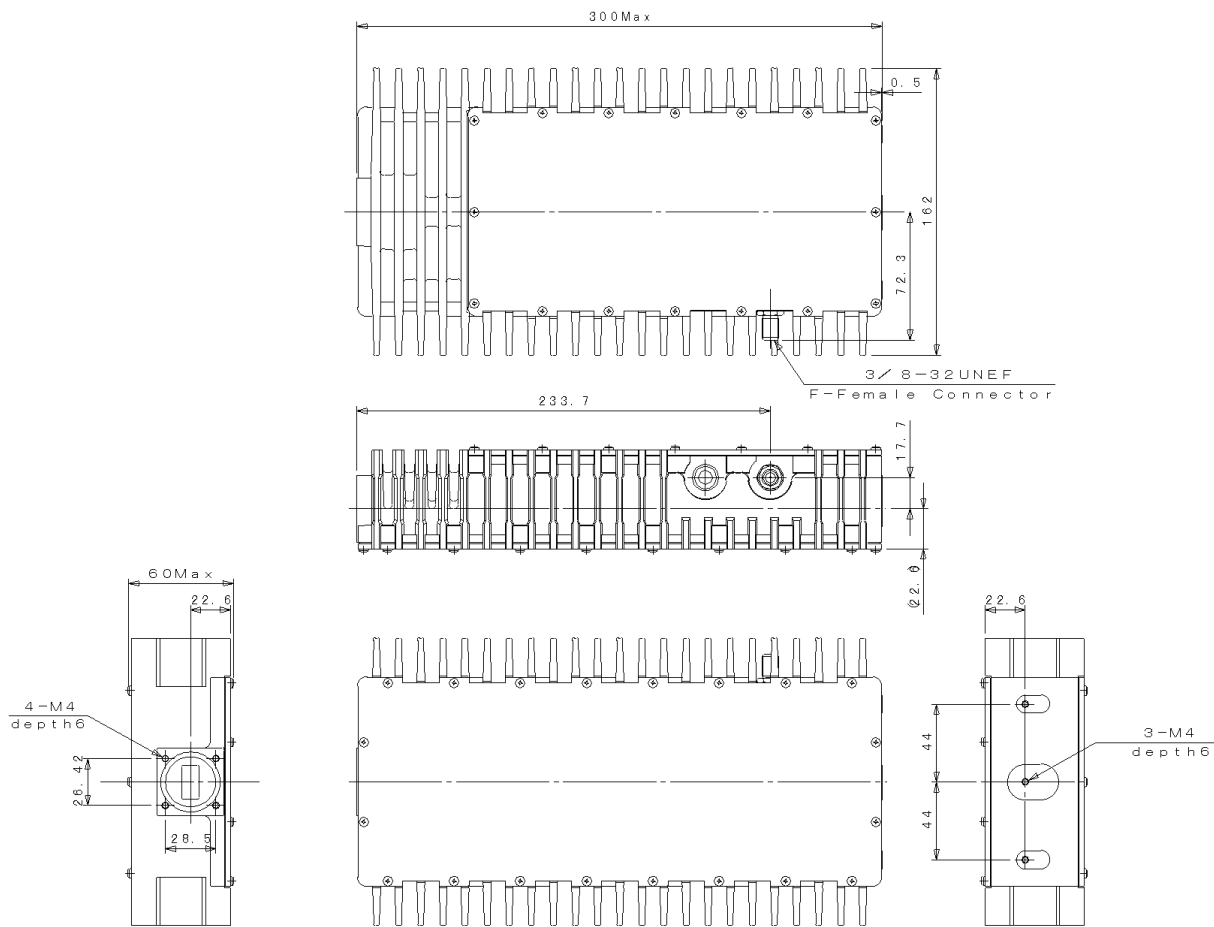

Unit: mm



New Japan Radio Co., Ltd.  
Microwave Components Division  
2-1-1, Fukuoka, Kamifukuoka Saitama  
356-8510 JAPAN  
Phone : +81-492-78-1270  
Fax : +81-492-78-1234  
Web Site : <http://www.njr.co.jp>